


02 DOUBLE-HEIGHT ENTRY & GLASS LIFT LOBBY

REV-07

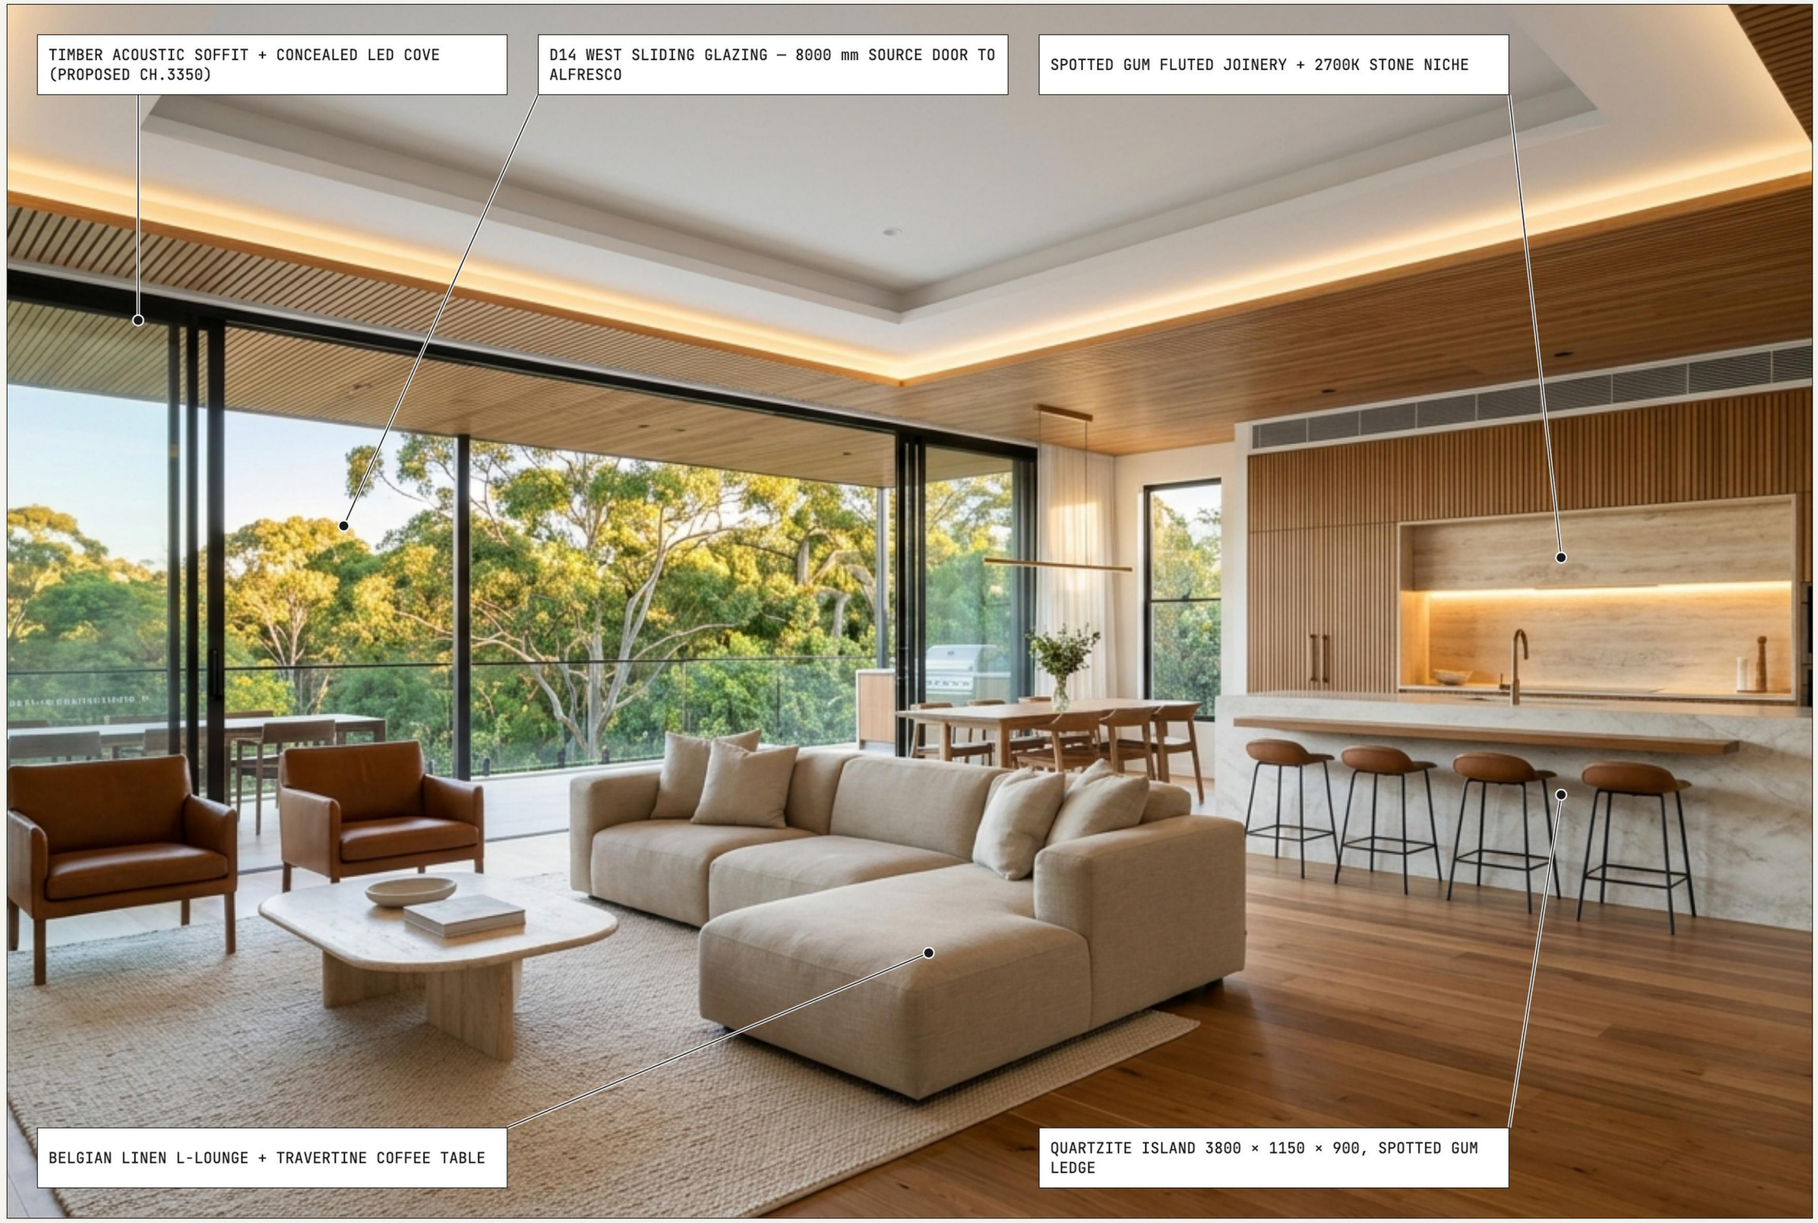

Spotted Gum battens continue from exterior; stair, void and lift stay on the CC geometry.

03 SPATIAL SUMMARY

SOURCE ANNOTATIONS, m²

LVL	SPACE	M²
GF	Living Room	32.10
GF	Dining	15.37
GF	Kitchen	21.56
GF	W.I.P	3.90
GF	Home Office	15.38
GF	Bedroom 4	14.49
GF	Bedroom 3	17.02
GF	Ens.3	8.61
GF	Garage	64.11
LGF	Entertainment	33.78
LGF	Bar	16.71
LGF	Master Bedroom	15.82
LGF	Laundry	7.73
LGF	Bathroom 1	8.18
LGF	Bedroom 1	17.20
LGF	Bedroom 2	16.09
LGF	Ens.0	5.14
LGF	Ens.1	4.69
	Σ 18 primary spaces	317.88

04 PROGRAMME FIGURES

READ FROM exports/verification.json

344.25
m² Σ ANNOTATED SPACES
23 spaces, CC200 LGF + CC201 GF

69.03
m² GF LIVING / DINING / KITCHEN
32.10 + 15.37 + 21.56

50.49
m² LGF ENTERTAINMENT / BAR
33.78 + 16.71

18
COORDINATED ROOMS
primary spaces carried through CC200 + CC201

Areas are the source CAD area annotations of CC200 and CC201 (not a new survey). 23 annotated spaces include 5 secondary rooms (WIR, storage, plant room, bath) outside the 18 primary spaces. Callout dimensions as drawn on the CAD sheets of SH-03.

TITLE	LOCATION	CONTEST · UNITS	SOFTWARE	SHEET
PROJECT: HOOP PINE PLACE, WEST PENNANT HILLS NSW 2125 — INTERIOR CONCEPT	**SYDNEY, AUSTRALIA**	**#2801036 · MM**	**CAD DXF / DWG DRAWING PACKAGE**	**SHEET SH-01** OF 04


01 LOWER GROUND ENTERTAINMENT + TRAVERTINE WET BAR

REV-01 / REV-02 · CAM 02



02 EAST WALL — CABINET REMOVAL

COORD-01

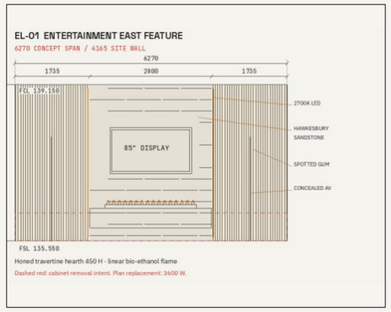

EL-01 — dashed red: existing cabinet removal intent; new 3600 mm feature wall.



After — Hawkesbury sandstone and Spotted Gum feature wall, hearth 450 H, six LED steps.

03 BEFORE / AFTER, EAST WALL

mm · SOURCE CC200


ITEM	BEFORE	AFTER
Cabinet carcass depth	400	removed
Door-swing envelope	553.9	removed
East wall clear	4,165	4,165
Wall lining	—	180
Feature wall width	—	3,600
Hearth, plan × height	—	2,800 × 450 × 450
Clear width gain beyond hearth	—	+220

Remove only the 34 identified cabinet entities. Net gain 220 mm outside the hearth; the brief's +420 assumes a 600 mm cabinet and is not a measured gain.

Before state = 34 cabinet entities in CC200, kept on the switched-off layer ID_EXISTING_SUPERSEDED in the DXF / DWG.

04 CAD JOINERY ELEVATIONS EL-01 / EL-02

1:50 AT 417.4 mm IMAGE WIDTH

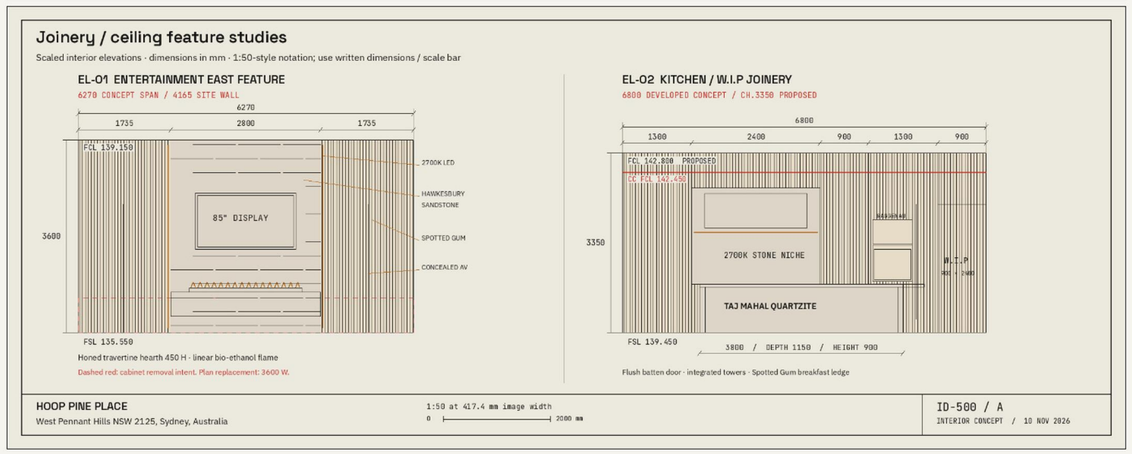


05 ELEVATION DATUMS & COORDINATION

SHEET	ELEVATION	H MM	DATUMS	COORDINATION STATUS
EL-01	Entertainment east feature	3,600	FSL 135.550 · FCL 139.150	Clearly marked UNCOORDINATED CONCEPT SPAN. The plan uses a 3600 mm feature, with 400 / 2800 / 400 bays.
EL-02	Kitchen / W.I.P joinery	3,350	FSL 139.450 · FCL 142.800 proposed	Show both datums; higher ceiling requires architectural coordination. Not represented as a measured straight site wall; retained window, pantry opening and services require coordination.

TITLE	LOCATION	CONTEST · UNITS	SOFTWARE	SHEET
PROJECT: HOOP PINE PLACE, WEST PENNANT HILLS NSW 2125 — INTERIOR CONCEPT	SYDNEY, AUSTRALIA	#2801036 · MM	CAD DXF / DWG DRAWING PACKAGE	SHEET SH-02 OF 04


01 UPPER GROUND FLOOR — CC201

REV-05..08 · CAM 01 / 04 / 05

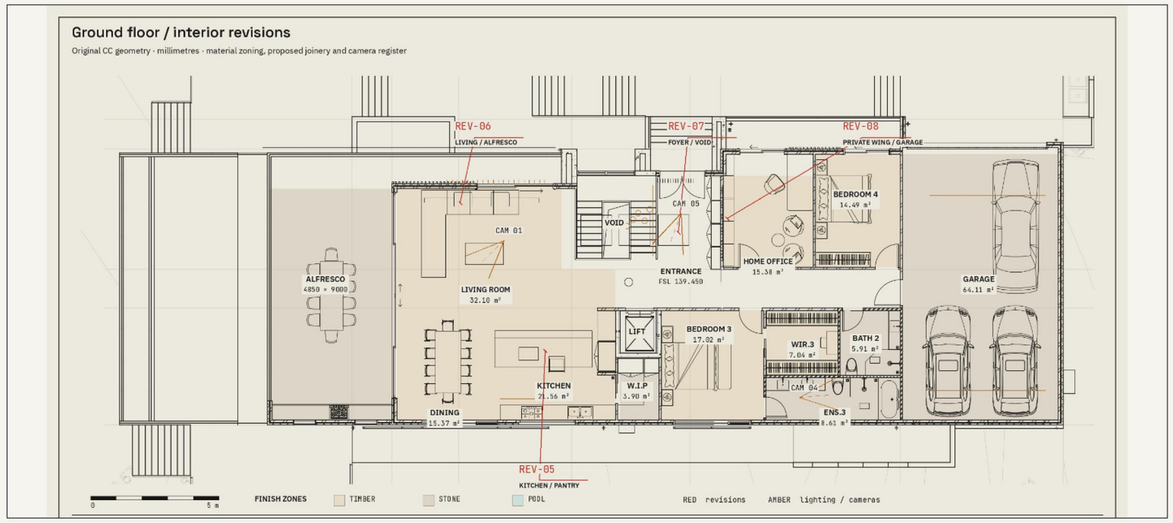

02 LOWER GROUND FLOOR — CC200

REV-01..04 · CAM 02 / 03

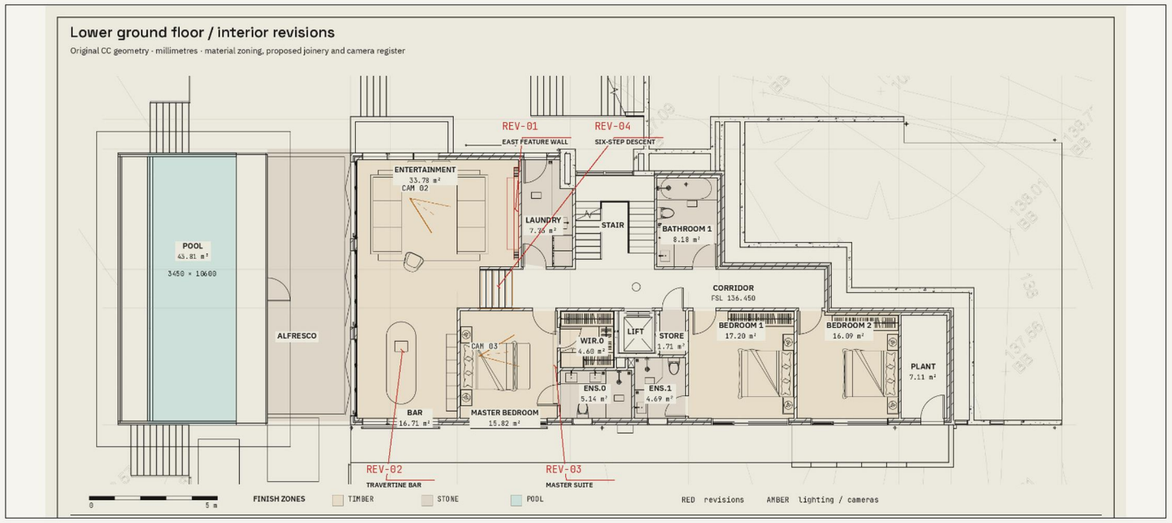

03 INTERIOR REVISION SCHEDULE

REV-01 TO REV-08

REV	LVL	SUBJECT	SCOPE AS DRAWN
REV-01	LGF	**Sandstone / Spotted Gum feature wall**	3600 full-height feature with 180 lining; floating travertine ethanol hearth 450 H; existing cabinet removed (source depth 400); +220 clear width beyond hearth.
REV-02	LGF	**Sculpted wet bar**	3200 × 1150 curved travertine island; bronze-glass temperature-controlled wine wall on east partition; sink retained in bar.
REV-03	LGF	**Master dressing suite**	Fluted Spotted Gum / linen headboard; bronze reeded-glass pocket-door intent; dual-sided WIR.0; stone tub and twin vanity in ENS.0 subject to fixture-fit coordination.
REV-04	LGF	**Descent to pavilion**	FSL 136.450 → 135.550 over six 150 risers; 2700K concealed tread / wall-wash lighting; Entertainment CH.3600 from CC500.
REV-05	GF	**Kitchen / concealed pantry**	3800 × 1150 × 900 quartzite island; cantilevered Spotted Gum breakfast ledge; concealed W.I.P face; 2700K stone niche; EL-02 is a developed joinery concept.
REV-06	GF	**Living to tree canopy**	Belgian linen L-lounge / travertine table; West D14 source door 8000, alfresco 9000; timber acoustic soffit proposed CH.3350, CC501 CH.3000 kept as datum.
REV-07	GF	**Entry / stair / glass lift**	Exterior Spotted Gum battens continue inside; cascading glass / brass void chandelier; stair, void and lift remain on CC geometry; CAM 05 looks south.
REV-08	GF	**Private wing / showroom**	Bronze acoustic reeded-glass office screen; bespoke WIR.3 / ENS.3 timber joinery intent; basalt finish and gallery lighting in garage; CAM 04 in GF ENS.3.

04 NATIVE HANDOVER PACKAGE

FILE	CONTENT	SIZE
Hoop_Pine_Place_CC200_LGF_Interior_Markup.dwg	LGF drawing, R2000 DWG	1,153 KB
Hoop_Pine_Place_CC200_LGF_Interior_Markup.dxf	LGF exchange file	2,801 KB
Hoop_Pine_Place_CC201_GF_Interior_Markup.dwg	GF drawing, R2000 DWG	933 KB
Hoop_Pine_Place_CC201_GF_Interior_Markup.dxf	GF exchange file	2,562 KB
Hoop_Pine_Place_Sydney_Interior_Concept_A3.pdf	4-page A3 landscape PDF	
Hoop_Pine_Place_Sydney_Interior_Master_Pack.zip	boards, renders, CAD, DXF / DWG, PDF	

05 SOURCE RETENTION & COORDINATION REGISTER

OPEN FOR ARCHITECT / ENGINEER REVIEW

ID	ITEM	TREATMENT IN THIS DELIVERY
COORD-01	Entertainment cabinet / clearance	Remove only the 34 identified cabinet entities. Net gain 220 mm outside the hearth; the brief's +420 assumes a 600 mm cabinet and is not a measured gain.
COORD-02	EL-01 span	Clearly marked UNCOORDINATED CONCEPT SPAN. The plan uses a 3600 mm feature, with 400 / 2800 / 400 bays.
COORD-03	GF living / kitchen ceiling	Show both datums; higher ceiling requires architectural coordination.
COORD-04	D14 sliding glazing	Label D14 as 8000 mm source door; do not present 9000 as its measured opening.
COORD-05	ENS.0 fixture fit / W.I.P door	Fixture and 900 mm leaf shown as design intent, not a verified fit or an enlarged structural opening.
COORD-06	EL-02 6800 mm straight wall	Not represented as a measured straight site wall; retained window, pantry opening and services require coordination.

TITLE	LOCATION	CONTEST · UNITS	SOFTWARE	SHEET
PROJECT: HOOP PINE PLACE, WEST PENNANT HILLS NSW 2125 — INTERIOR CONCEPT	**SYDNEY, AUSTRALIA**	**#2801036 · MM**	**CAD DXF / DWG DRAWING PACKAGE**	**SHEET SH-03** OF 04

01 MASTER BEDROOM SUITE

REV-03 · CAM 03 · MASTER 15.82 m² + WIR.0 4.60 m²



Fluted Spotted Gum / linen headboard; bronze reeded-glass pocket-door intent; dual-sided WIR.0.

02 MASTER ENSUITE


ENS.0 / ENS.3 · CAM 04



Fluted travertine wall and freestanding stone bath; fixture fit and services subject to coordination (COORD-05).

03 PHYSICAL MATERIAL FLATLAY

AUSTRALIAN CONTEMPORARY PALETTE

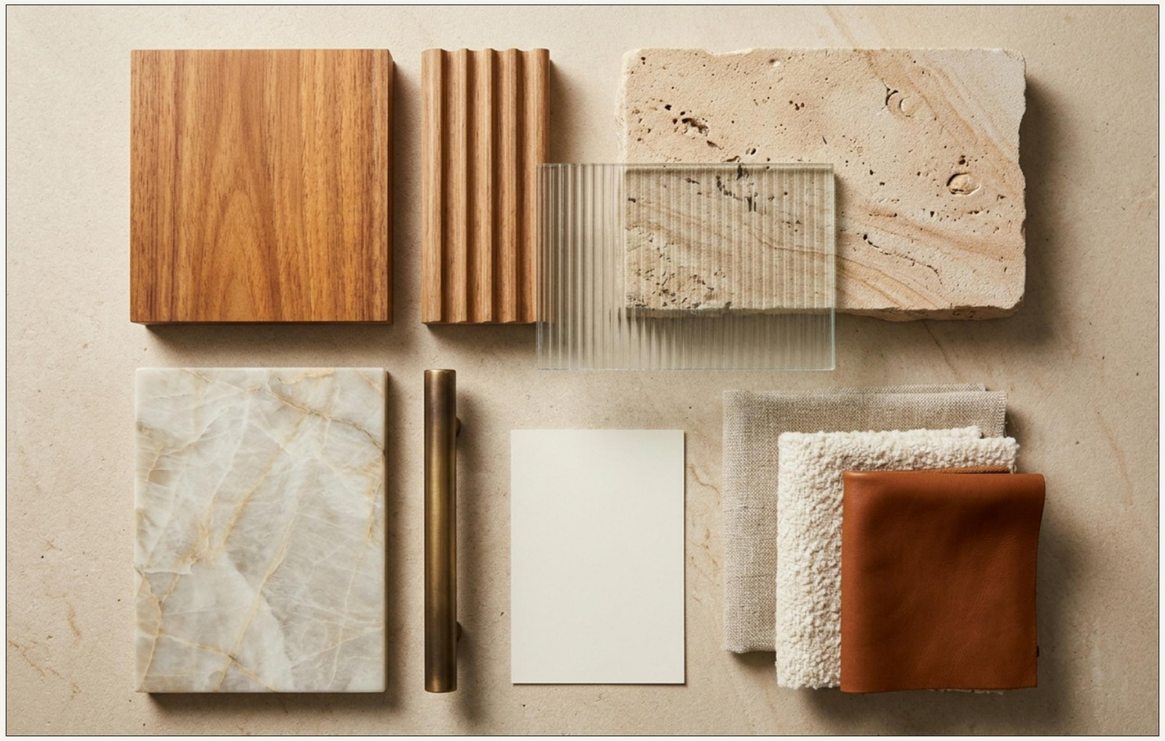

04 FINISHES, STONE, TIMBER & LIGHTING SCHEDULE

REF	FINISH	APPLICATION AS DRAWN
ST-01	**Hawkesbury sandstone**	EL-01 east feature wall, 3600 × 180 lining, full height (REV-01)
ST-02	**Honed travertine**	Hearth 450 H (REV-01); curved bar island 3200 × 1150 (REV-02); fluted ENS.0 / ENS.3 walls and stone tub; entry console
ST-03	**Taj Mahal quartzite**	Kitchen island 3800 × 1150 × 900 and splashback niche (REV-05)
ST-04	**Basalt**	Garage floor finish (REV-08)
TM-01	**Spotted Gum**	Feature-wall flanks (REV-01); fluted headboard (REV-03); breakfast ledge (REV-05); battens continued from exterior (REV-07)
TX-01	**Belgian linen**	L-lounge (REV-06); master headboard (REV-03)
GL-01	**Bronze reeded glass**	Wine wall (REV-02); master pocket door (REV-03); home-office screen (REV-08)
MT-01	**Brass**	Cascading glass / brass void chandelier (REV-07)
LT-01	**Concealed LED 2700K**	Tread and wall-wash lighting (REV-04); stone niche (REV-05); feature wall (EL-01); ceiling coves
LT-02	**Gallery lighting**	Garage showroom (REV-08)

TITLE	LOCATION	CONTEST · UNITS	SOFTWARE	SHEET
PROJECT: HOOP PINE PLACE, WEST PENNANT HILLS NSW 2125 — INTERIOR CONCEPT	**SYDNEY, AUSTRALIA**	**#2801036 · MM**	**CAD DXF / DWG DRAWING PACKAGE**	**SHEET SH-04** OF 04